



SP7131/Y, REGULATED, 50W, SPECIFICATION SHEET



ELECTRICAL SPECIFICATIONS

Input Voltage.....	18-36Vdc	Input Filter	Low ESR Capacitor
Output Voltage.....	,180Vdc	Efficiency	89% (typ.)
Output Current.....	.277mA	Short Circuit Protection	Continuous
Voltage Accuracy	+/- 1%	Switching Frequency	130 kHz
Line Regulation	+/- 0.3%	Output Isolation	1000 Vdc
Load Regulation	+/- 0.5%	Input / Output Capacitance	< 200pF
Output Ripple	< 0.5 % P-P		

GENERAL SPECIFICATIONS

Temp. Stability	+/- 0.02%/°C	EMI/RFI	Six Sided Shield (Case is connected to -IN)
Temp. (Operating , Case)	-25 to +70°C	Derating	None
Temp. (Storage)	-40 to +125°C	Cooling	Free-Air Convection


Note: Customer to be notified of any changes to the bill of materials.

PHYSICAL SPECIFICATIONS


Dimensions	2 x 2 x 0.51 inches	Case Material	Nickel Plated Copper
Weight	2.8 Oz		(With Non-Conductive Base Plate)



SP7131/Y, REGULATED, 50W, SPECIFICATION SHEET

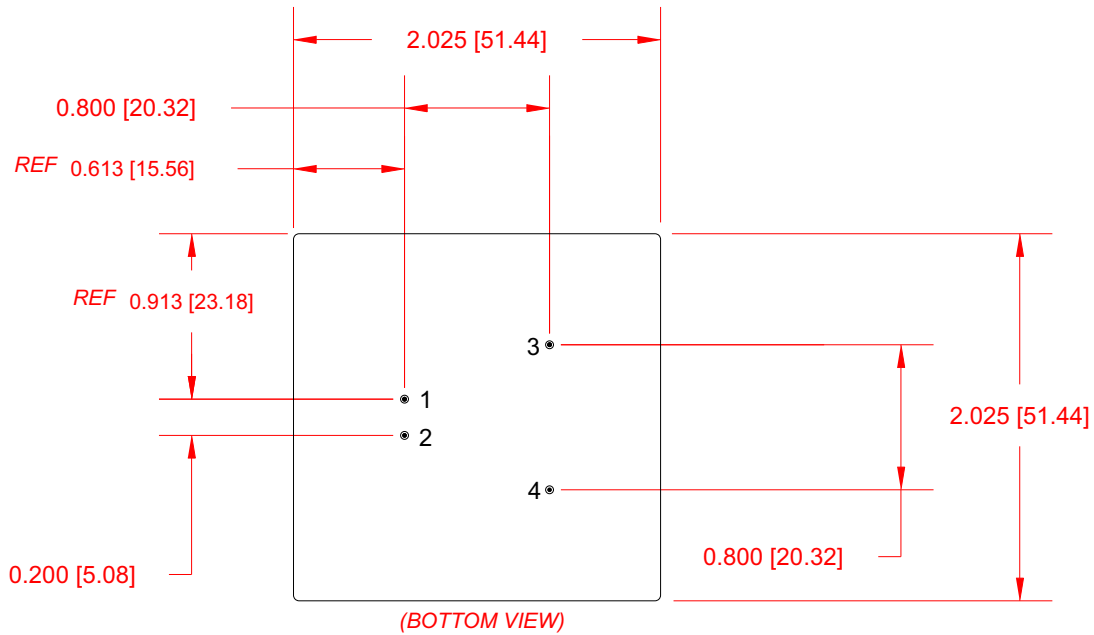

PINS: TIN PLATED BRASS
MATTE FINISH

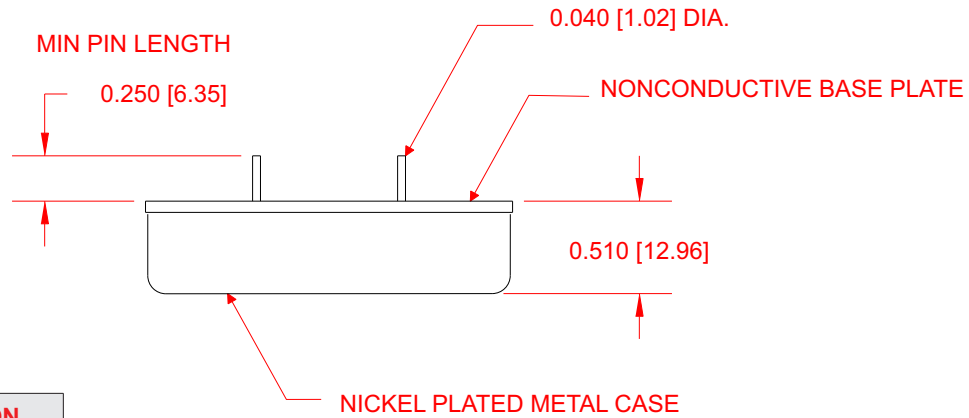

PIN #	FUNCTION
1	+ Input
2	- Input
3	+Output
4	- Output

Dimensions are in Inches
[Metric equivalents in brackets]



SP7131/Y,REGULATED, 50W, SPECIFICATION SHEET

APPLICATION NOTES

CLEANING AGENTS

In order to avoid possible damage, any penetration of cleaning fluids must be prevented, since the power supplies are not hermetically sealed.

NUCLEAR AND MEDICAL APPLICATIONS

American Power Design products are not designed, intended for use in, or authorized for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems without the express written consent of American Power Design, Inc.

SAFETY REQUIREMENTS

The converters are designed to meet North American and International safety regulatory requirements per UL 60950-1/CSA 22.2 No. 60950-1-07 Second Edition, IEC 60950-1:2005, and EN 60950-1:2006. Basic Insulation is provided between input and output. To comply with safety agencies requirements, an input line fuse must be used external to the converter. The table below provides the recommended fuse rating for use with this family of products.

Input Voltage Range	Fuse Rating
18-36Vdc	5A

If one input fuse is used for a group of modules, the maximum fuse rating should not exceed 20A.

WARRANTY

All products manufactured by American Power Design, Inc. (APD) are warranted to be free of defects due to material or workmanship for a period of one year from date of shipment. At our option, APD will repair or replace any non-conforming product.

APD expressly disclaims any liability for consequential or incidental damages resulting from the use or misuse of its products by the purchaser or others.

This warranty is in lieu of all warranties expressed or implied, including the warranties of merchantability. No other warranties, obligations, or liabilities are expressed or implied.

All products being returned for repair require a return material authorization(RMA) assigned by APD prior to return shipment.