



"The best high voltage design solution"

SP7266 (1W, Dual Vout = +/-2.5kV) SPECIFICATION SHEET

Customer Approval

Name _____

Signature _____

Date (MM/DD/YYYY) _____

Customer Signature Required

Standard Model Number : SP7266

RoHs Model Number : SP7266/Y

ELECTRICAL SPECIFICATIONS

Standard Model is NOT RoHs Compliant

Input Voltage 11.5V - 16Vdc
 Input Current <110mA (No Load)
 Input Current <250mA (Full Load)
Output Voltage 0V to +/-2500Vdc (Programmable)
 Output Current 0.2 mA
 Voltage Accuracy +/- 1%
 Line Regulation < 0.05%
 Load Regulation < 0.05%
Output Ripple < 100mV P-P

Programming Voltage 0 to +5Vdc
 Programming Current < 100uA
 Programming Linearity <1% (5% to 100% Vout)
 Input Filter Low ESR Capacitor
Reverse Input Protection 50V
Short Circuit Protection Continuous
 Switching Frequency 200 kHz
 Calibration Adjustment 5 to 10%
 Response Time <250 ms (Full Load, full scale response)
Programming Voltage Shutdown > 5.2Vdc

GENERAL SPECIFICATIONS

Stability < 0.01% / Hr.
 Temp. Stability +/- 0.01%/°C
 Temp. (Operating , Case) -25 to +85°C
 Temp. (Storage) -40 to +125°C

Humidity 0 to 95% (Non-Condensing)
 Thermal Shutdown >85°C (Case)
 Thermal Shock Limit 1°C / 10 Seconds
EMI/RFI Six-Sided Shield
 Derating None
 Cooling Free-Air Convection

PHYSICAL SPECIFICATIONS

Dimensions 1.1 x 1.75 x 0.5 inches
 Weight 1.3 Oz


Case Material Nickel Plated Steel






"The best high voltage design solution"

SP7266 (1W, Dual Vout = +/-2.5kV) SPECIFICATION SHEET

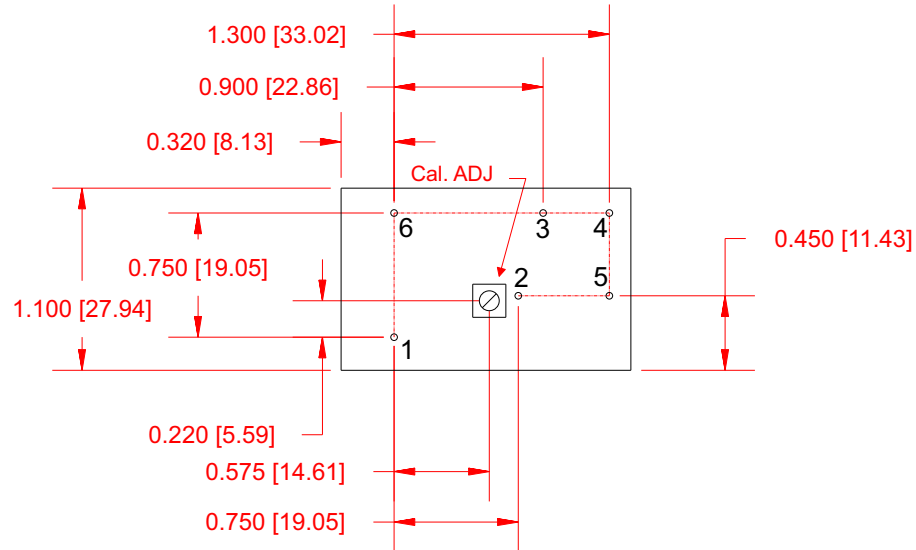


Bottom View

PIN - 0.04 [1.02] Dia.
Tin Plated Brass
Matte Finish 6 Plc



0.20 [5.08] Min. Pin Length

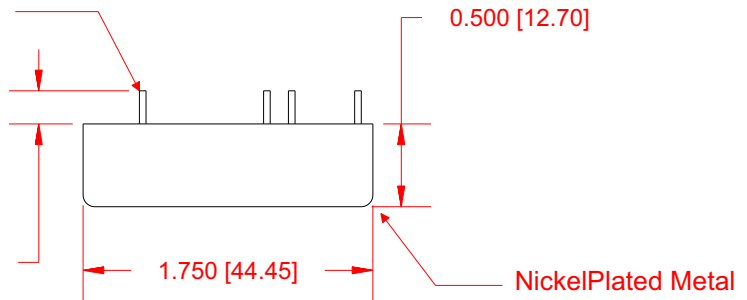

PIN #	FUNCTION
1	+HV Output
2	Control / Programming Voltage
3	-IN / GND
4	Case / Gnd
5	+ Input
6	-HV Output

*Dimensions are in Inches
[Metric equivalents in brackets]*



"The best high voltage design solution"

SP7266 (1W, Dual Vout = +/-2.5kV) SPECIFICATION SHEET

APPLICATION NOTES

CLEANING AGENTS

In order to avoid possible damage, any penetration of cleaning fluids must be prevented, since the power supplies are not hermetically sealed.

NUCLEAR AND MEDICAL APPLICATIONS

American Power Design products are not designed, intended for use in, or authorized for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems without the express written consent of American Power Design, Inc.

SAFETY REQUIREMENTS

The converters are designed to meet North American and International safety regulatory requirements per UL 60950-1/CSA 22.2 No. 60950-1-07 Second Edition, IEC 60950-1:2005, and EN 60950-1:2006. Basic Insulation is provided between input and output. To comply with safety agencies requirements, an input line fuse (0.5A fast-acting) must be used external to the converter.

If one input fuse is used for a group of modules, the maximum fuse rating should not exceed 10A (fast-acting).

WARRANTY

All products manufactured by American Power Design, Inc. (APD) are warranted to be free of defects due to material or workmanship for a period of one year from date of shipment. At our option, APD will repair or replace any non-conforming product.

APD expressly disclaims any liability for consequential or incidental damages resulting from the use or misuse of its products by the purchaser or others.

This warranty is in lieu of all warranties expressed or implied, including the warranties of merchantability. No other warranties, obligations, or liabilities are expressed or implied.

All products being returned for repair require a return material authorization(RMA) assigned by APD prior to return shipment.