



"The best high voltage design solution"

SP7277, 1W, -24kV, SPECIFICATION SHEET

Customer Approval

Name _____

Signature _____

Date (MM/DD/YYYY) _____

Customer Signature Required

Standard Model Number : SP7277

RoHs Model Number : SP7277/Y

ELECTRICAL SPECIFICATIONS

Standard Model is NOT RoHs Compliant

Input Voltage	2V to 15Vdc	Load Regulation	<5% for 50% load change
Input Current	<200mA (Full Load)	Output Ripple	< 1% P-P
Output Voltage	-3.2kVdc to -24kVdc	Input Filter	Low ESR Capacitor
Output Current	0.04mA	Short Circuit Protection	Continuous
Voltage Accuracy	< 5%	Switching Frequency	85 kHz
Line Regulation	Proportional	Isolation (Gnd/Case to HV RTN)	500Vdc

GENERAL SPECIFICATIONS

Temp. (Operating , Case)	-10 to +60°C	EMI/RFI	Six-Sided Shield
Temp. (Storage)	-40 to +125°C	Derating	None
Humidity	30 to 85% (Non-Condensing)	Cooling	Free-Air Convection
Thermal Shock Limit	1°C / 10 Seconds		

PHYSICAL SPECIFICATIONS


Dimensions	4.96 x 1.97 x 1.22 inches	Encapsulation Material	UL 94V-0 Epoxy
Weight	1.8 Oz	Case Material	Conductive Passivated Aluminum





"The best high voltage design solution"

SP7277, 1W, -24kV, SPECIFICATION SHEET

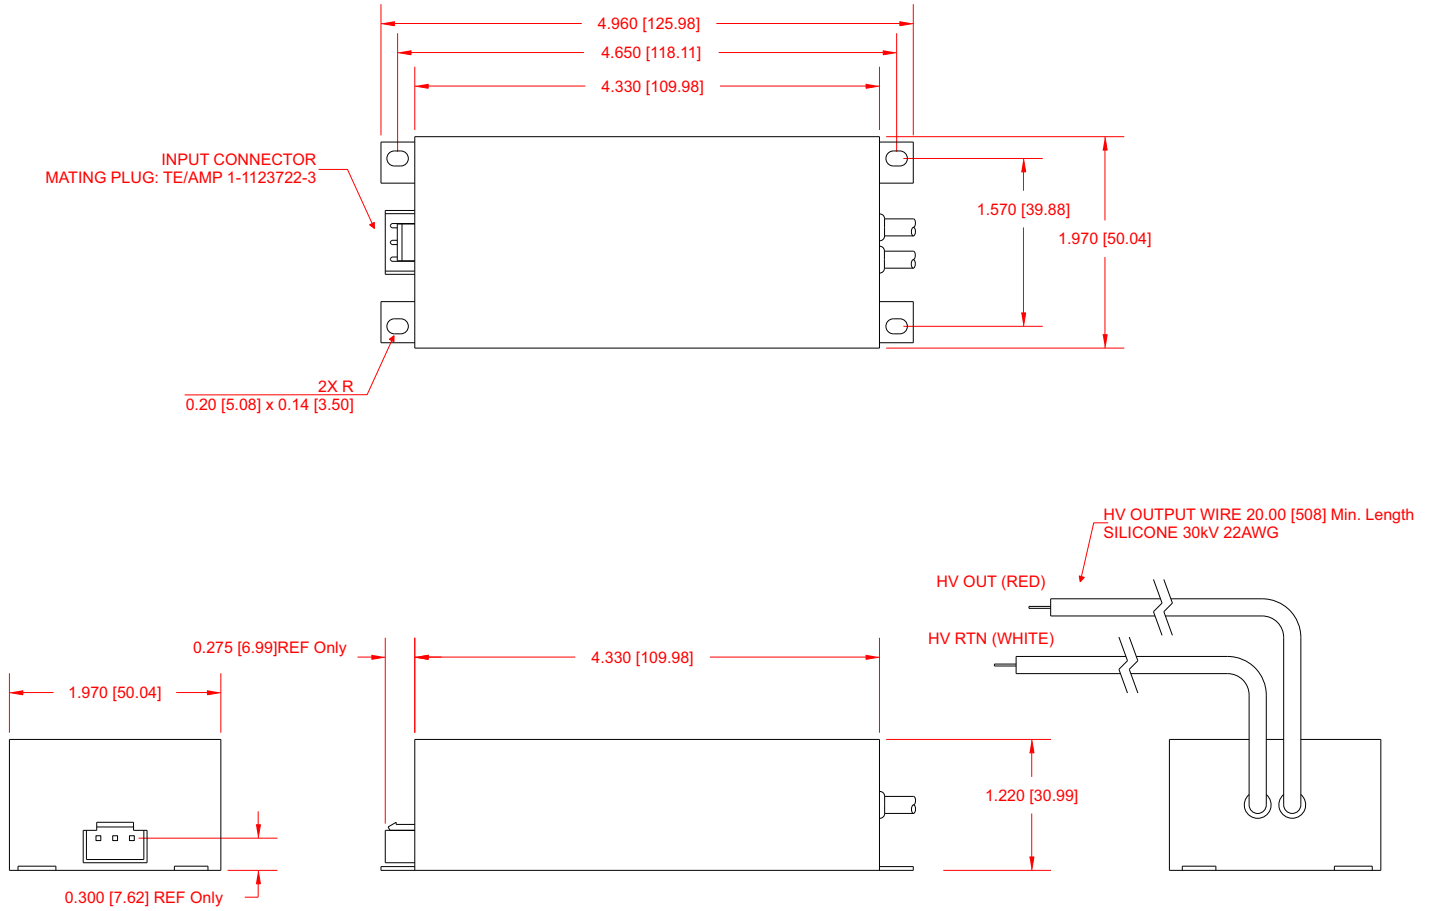

PIN #	FUNCTION
1	+ Input
2	GND/ Case
3	N/C

*Dimensions are in Inches
[Metric equivalents in brackets]*



"The best high voltage design solution"

SP7277, 1W, -24kV, SPECIFICATION SHEET

APPLICATION NOTES

CLEANING AGENTS

In order to avoid possible damage, any penetration of cleaning fluids must be prevented, since the power supplies are not hermetically sealed.

NUCLEAR AND MEDICAL APPLICATIONS

American Power Design products are not designed, intended for use in, or authorized for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems without the express written consent of American Power Design, Inc.

SAFETY REQUIREMENTS

The converters are designed to meet North American and International safety regulatory requirements per UL 60950-1/CSA 22.2 No. 60950-1-07 Second Edition, IEC 60950-1:2005, and EN 60950-1:2006. Basic Insulation is provided between input and output. To comply with safety agencies requirements, an input line fuse (1A SB) must be used external to the converter.

If one input fuse is used for a group of modules, the maximum fuse rating should not exceed 20A.

WARRANTY

All products manufactured by American Power Design, Inc. (APD) are warranted to be free of defects due to material or workmanship for a period of one year from date of shipment. At our option, APD will repair or replace any non-conforming product.

APD expressly disclaims any liability for consequential or incidental damages resulting from the use or misuse of its products by the purchaser or others.

This warranty is in lieu of all warranties expressed or implied, including the warranties of merchantability. No other warranties, obligations, or liabilities are expressed or implied.

All products being returned for repair require a return material authorization(RMA) assigned by APD prior to return shipment.