



"The best high voltage design solution"

SP7278, Prop. 10W, SPECIFICATION SHEET

Customer Approval

Name _____

Signature _____

Date (MM/DD/YYYY) _____

Customer Signature Required

Standard Model Number : SP7278

RoHs Model Number : SP7278/Y

ELECTRICAL SPECIFICATIONS

Standard Model is NOT RoHs Compliant

Input Voltage 24Vdc
 No Load Input Current <230 mA
 Full Load Input Current <900mA
 Output Voltage +6250Vdc
 Output Current 1.6 mA
 Voltage Accuracy +/- 4%
 Line Regulation Proportional
 Load Regulation +/- 20%

Output Ripple < 0.25% P-P
 Input Filter LC Network
 Efficiency > 70%
 Short Circuit Protection Continuous
 Switching Frequency 80 kHz
 Output Isolation 500 Vdc
 Input / Output Capacitance < 30pF

GENERAL SPECIFICATIONS

Temp. Stability +/- 0.05%/°C
 Temp. (Operating , Case) -20 to +85°C
 Temp. (Storage) -55 to +100°C
 Humidity 0 to 95% (Non-Condensing)

Derating None
 Cooling Free-Air Convection

PHYSICAL SPECIFICATIONS

Dimensions 1.7 x 2.6 x 0.85 inches
 Weight 3.5 Oz



Encapsulation Material UL 94V-0 Epoxy
 Case Material Black Anodized Aluminum





"The best high voltage design solution"

SP7278, Prop. 10W, SPECIFICATION SHEET

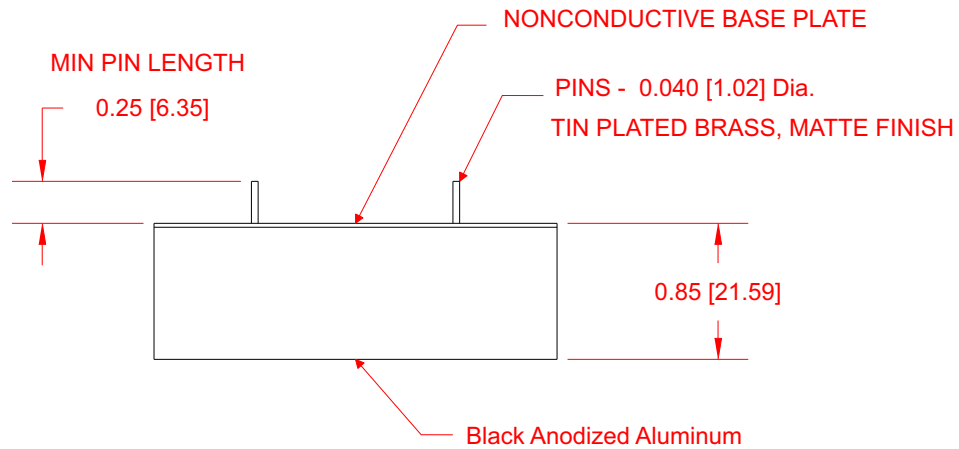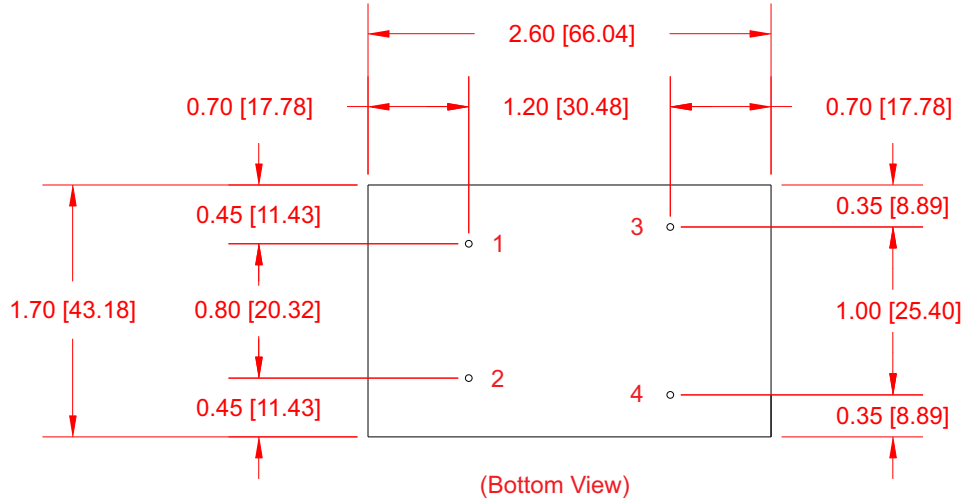

PIN #	FUNCTION
1	+ Input
2	- Input
3	- Output
4	+ Output

*Dimensions are in Inches
 [Metric equivalents in brackets]*



"The best high voltage design solution"

SP7278, Prop. 10W, SPECIFICATION SHEET

APPLICATION NOTES

CLEANING AGENTS

In order to avoid possible damage, any penetration of cleaning fluids must be prevented, since the power supplies are not hermetically sealed.

NUCLEAR AND MEDICAL APPLICATIONS

American Power Design products are not designed, intended for use in, or authorized for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems without the express written consent of American Power Design, Inc.

SAFETY REQUIREMENTS

The converters are designed to meet North American and International safety regulatory requirements per UL 60950-1/CSA 22.2 No. 60950-1-07 Second Edition, IEC 60950-1:2005, and EN 60950-1:2006. Basic Insulation is provided between input and output. To comply with safety agencies requirements, an input line fuse (2A SB) must be used external to the converter.

If one input fuse is used for a group of modules, the maximum fuse rating should not exceed 20A.

WARRANTY

All products manufactured by American Power Design, Inc. (APD) are warranted to be free of defects due to material or workmanship for a period of one year from date of shipment. At our option, APD will repair or replace any non-conforming product.

APD expressly disclaims any liability for consequential or incidental damages resulting from the use or misuse of its products by the purchaser or others.

This warranty is in lieu of all warranties expressed or implied, including the warranties of merchantability. No other warranties, obligations, or liabilities are expressed or implied.

All products being returned for repair require a return material authorization(RMA) assigned by APD prior to return shipment.