



15 Watt Dual Output DC/DC Converters

HIGH VOLTAGE
(HVPS) Condatas AG

Distribution
electronic
components

LWA15/MHIA Series

15 WATT DUAL OUTPUT

Regulated, 2:1 Input Range

MEDICAL

DC/DC Converters



FEATURES

- UL and CE Approved
- UL60601
- CAN/CSA C22.2 No. 601.1
- Double Insulation
- Wide Operating Temp. Range (-40 to +85° C)
- 2500 Vdc Input/Output Isolation
- Efficiency: 83%
- Short Circuit and Over Voltage Protection
- 6 Sided Continuous Metal Shielding

Specifications

Typical @ 25°C Under Full Load and Nominal Input Voltage, Unless Otherwise Specified.

■ INPUT

Input Voltages 24Vdc.....18-36Vdc

■ OUTPUT

Minimum load (note 1)10% of full load
Voltage Accuracy (Full load and nominal Vin)±1%
Line Regulation (LL to HL at FL)±1%
Load Regulation. 10% to 100% FL±2%
Ripple and Noise (20MHz BW)75mVp-p
Temperature Coefficient (at FL)±0.02%/°C, max
Transient Response, 25% load step500uS

■ GENERAL

Efficiency83%
Isolation Voltage2500Vdc, min.
Isolation Resistance10⁹ Ohms, min.
Switching Frequency500KHz, typ.
Protection Overload% of FL at nominal
Input150%, max.
Short circuithiccup, automatics recovery

■ ENVIRONMENTAL

Operating Temperature Range-40 to +85° C (with derating)
Storage Temperature Range-55 to +105° C
CoolingFree Air Convection
EMI/RFISix Sided Continuous Shield

■ PHYSICAL

Case MaterialNickel Coated Copper
Weight27g (0.95 oz.)
Dimensions2.00" x 1.00" x 0.40" (50.8 X 25.4 X 10.2 mm)

■ EMC CHARACTERISTICS

Conducted emissions	EN55022	Level A
Radiated emissions	EN55022	Level A
Conducted immunity	EN61000-4-6	Perf. Criteria2
Radiated immunity	EN61000-4-3	Perf. Criteria2
Surge	EN61000-4-5	Perf. Criteria2
Fast transient	EN61000-4-4	Perf. Criteria2
ESD	EN61000-4-2	Perf. Criteria2



Selection Guide


(Continued)

Input Voltage Nominal (Range) (Vdc)	Output Voltage (Vdc)	Output Current (mA)	Efficiency	Model Number*	Case
12 (9-18)	±12	±625	83%	LWA15-24-12MHIA	P


- Other output voltages and currents are available. Contact factory.

There is a 10% Minimum load requirement on the output to maintain specified regulation. Operation under no-load condition will not damage these devices. However, they may not meet all of the listed specifications.

Mechanical Specifications

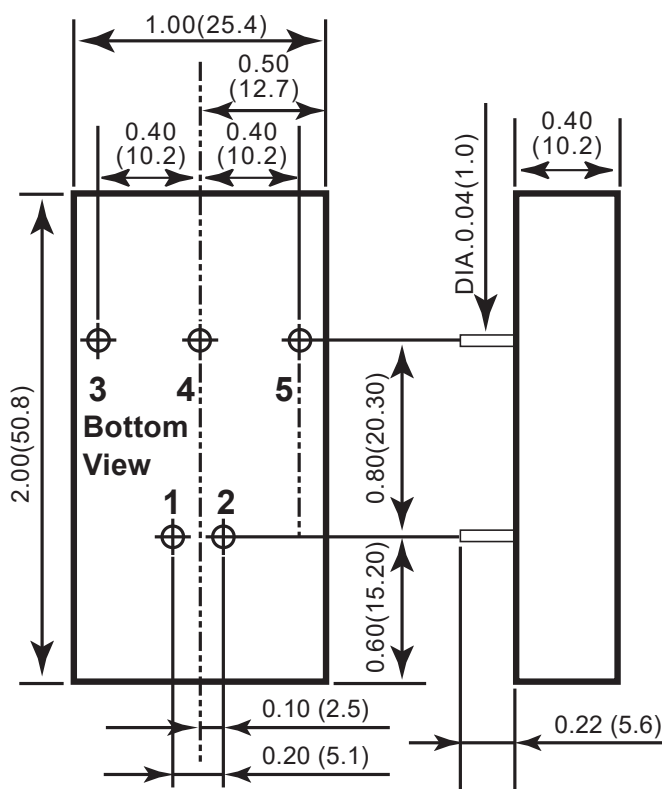

All dimensions in inches (mm)
Pin Pitch tolerance ± 0.014 (0.35)

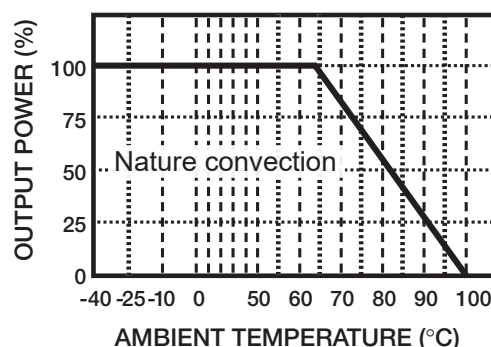

PIN CONNECTIONS	
PIN NO.	DUAL
1	+Vin
2	-Vin
3	+Vout
4	Common
5	-Vout