



5 WATT SINGLE OUTPUT

Isolated, Regulated
DC/DC Converters
24Vdc TO 125Vdc Output



FEATURES

- High Performance
 π Input Filter
- Short Circuit
Protection
- Extremely Low
Output Noise
- Highly Regulated
Floating Outputs
- Low Input Reflected
Ripple
- P.C. Card Mounting

PR45 Series

Specifications

All specifications are typical at nominal input, full load, and 25°C , unless otherwise noted.

INPUT

Voltage Range..... $\pm 10\%$
Input Filter..... Pi Network
Input Reflected Ripple..... $\pm 1\%$ of Input Voltage max

OUTPUT

Voltage Accuracy..... $\pm 1\%$ max.
Line Regulation..... $\pm 0.2\%$ max.
Load Regulation..... $\pm 0.2\%$ max.
Ripple Noise (20MHz Bw)..... 3 mV rms

GENERAL

Efficiency..... 55-65% nominal line @ FL
Isolation Voltage..... 500 Vdc
Protection..... Short Circuit Protection

ENVIRONMENTAL

Operating Temperature Range..... -25° to +71°C
Storage Temperature Range..... -55° to +105°C
Cooling..... Free Air Convection

PHYSICAL

Case Material (Case B1)..... Nickel Coated Copper w/
Non-Conductive Base
Case Material (Case C1)..... Black Phenolic Plastic w/
Plastic Base

Dimensions

Case B1..... 2.00" x 2.00" x 0.40"
Case C1..... 2.00" x 2.00" x 0.875"

Selection Guide

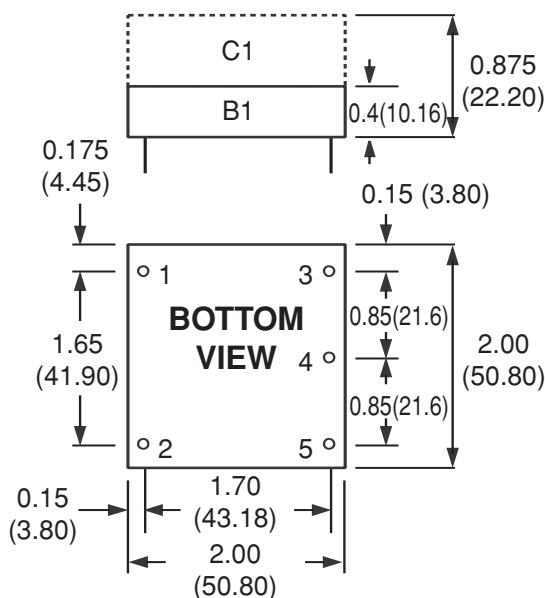
(Continued)

SINGLE OUTPUT VOLTAGE	Input Voltage Nominal (Vdc)	Output Voltage (Vdc)	Output Current (mA)	Model Number	Case	
	12	24	187	PR45-12S24	B1	
		48	93	PR45-12S48	C1	
		75	60	PR45-12S75	C1	
		100	45	PR45-12S100	C1	
		125	36	PR45-12S125	C1	
	15	24	187	PR45-15S24	B1	
		48	93	PR45-15S48	C1	
		75	60	PR45-15S75	C1	
		100	45	PR45-15S100	C1	
		125	36	PR45-15S125	C1	
	24	24	187	PR45-24S24	B1	
		48	93	PR45-24S48	C1	
		75	60	PR45-24S75	C1	
		100	45	PR45-24S100	C1	
		125	36	PR45-24S125	C1	

Mechanical Specifications

I/O Connections	
Pin	SINGLE
1	+Vin
2	-Vin
3	+Vout
4	N/C
5	-Vout

CASE B1, C1

**NOTE:**

OTHER VOLTAGES AVAILABLE.

CHASSIS MOUNTING AVAILABLE.
CONTACT FACTORY.**All Dimensions are in inches (mm)**