

AC-DC POWER SUPPLY MODULES

UNIVERSAL INPUT, 10 WATTS

SINGLE AND DUAL OUTPUT

UIL10 SERIES



FEATURES

- Universal Input (90-264Vac)
- High Efficiency Up to 82%
- Protection: Short Circuit/ Overload/ Over Voltage
- Encapsulated Plastic Case
- Dimensions (2.5" × 1.75" × .75")
- Internal Input Filter
- Safety Meets EN60950-1
- CE Certified
- Compliant to RoHS

SELECTION GUIDE All specifications are typical at nominal input, rated output current and 25°C, unless otherwise noted.

Output Wattage W	Output Voltage Vdc	Output Current mA	Ripple & Noise mV	Efficiency %	Model Number
10	3.3	3000	100	74	UIL10-33S
10	5	2000	100	76	UIL10-5S
12	12	1000	150	80	UIL10-12S
12	15	800	150	80	UIL10-15S
12	24	500	240	80	UIL10-24S
12	48	250	240	82	UIL10-48S
10	±5	±1000	100	75	UIL10-5D
12	±12	±500	150	75	UIL10-12D
12	±15	±400	150	75	UIL10-15D
12	±24	±250	240	77	UIL10-24D
10	Vo1=+5, Vo2=+12	Io1=1500, Io2=200	100(Vo1), 150(Vo2)	74	UIL10-512D
10	Vo1=+5, Vo2=+15	Io1=1400, Io2=200	100(Vo1), 150(Vo2)	74	UIL10-515D
10	Vo1=+5, Vo2=+24	Io1=1200, Io2=200	100(Vo1), 150(Vo2)	75	UIL10-524D



European Stocking Distributor
Phone: +41 44 730 33 53

Email: sales@hvps-condatas.com / www.hvps-condatas.com
Rietbachstrasse 7, 8952 Schlieren (ZH), Switzerland

UIL10 SERIES

Input Specifications			Output Specifications		
Rated input voltage, Vac	100-240 Typ.	V_o, I_o (nom)		± 3	V_i, I_o (nom), Single, 3.3V, 5V Model
Voltage range	90 Min., 264 Max.	AC in, V_o, I_o (nom)	Voltage accuracy, %	± 2	V_i, I_o (nom), Single, 12V, 48V Model
	120 Min., 370 Max.	DC in, V_o, I_o (nom)		± 5	Dual output
Frequency, Hz	47 Min., 50/60 Typ., 63 Max.	V_i, I_o (nom)	Line regulation, %	± 1	$I_o: V_i$ Min., Max.
Input current, A	0.5 Max.	V_o, I_o (nom)	Load regulation, %	± 2	I_o (nom) Min., Single Output
				± 5	I_o (nom) Min., Dual Output
Inrush current, A	10 Max.	115Vac, V_i, I_o (nom)	Minimum load, %	0 Min.	V_i (nom), Single Output
	20 Max.	230Vac, V_i, I_o (nom)		20 Min.	V_i (nom), Dual Output
Fast startup, ms	100 Typ.	At 230Vac	Ripple and noise, mV	100 Min, 240 Max.	Measured by 20MHz bandwidth, 47 μ F paralleled with high-frequency 0.47 μ F capacitor across each output by full load
Hold-up time, ms	10 Typ.	At 90Vac	Transient recovery time, μ s	1,000 Typ.	V_i, I_o (nom) = 0.5 I_o (nom)
Input fuse	VDE/CCC Fuse 2.5A/250V(Slow Blow)		Over voltage protection, Vdc	120%-150% rated output	Zener diode clamp protection
			Over load protection, %	Above 110% rated output power	Recovers automatically after fault condition is removed
			Short circuit protection	Recovers automatically after fault condition is removed	


General Specifications			
Isolation voltage,	3KVac/5mA/5Secs		Input to Output
Isolation resistance, M Ω	100 Min.	500Vdc	Input to Output
Derating, %	2 Max.	V_i, I_o +51 to 71 (nom)	
Switching frequency, kHz	65 Typ.	V_i, I_o (nom)	

Environmental Specifications		
Operating ambient temperature, $^{\circ}$ C	-20 to +70	Operating at V_i, I_o (nom)
Storage temperature range, $^{\circ}$ C	-40 to +85	Non operational
Cooling	Free air convection	
Relative humidity, %RH	+95 Max.	V_i, I_o (nom)


Physical Specifications		EMC Specifications	
Design meet safety standard	EN60950-1, CE Certified	Relative Humidity, % RH	95 Max. V_i, I_o (nom)
Dimensions, mm (inches)	L63.50 $\times$ W44.45 $\times$ H19.05 mm (2.5 $\times$ 1.75" $\times$ 0.75")	EMI conduction and radiation	EN55022
		EMS immunity	EN55024

UIL10 SERIES

Temperature Derating Graph

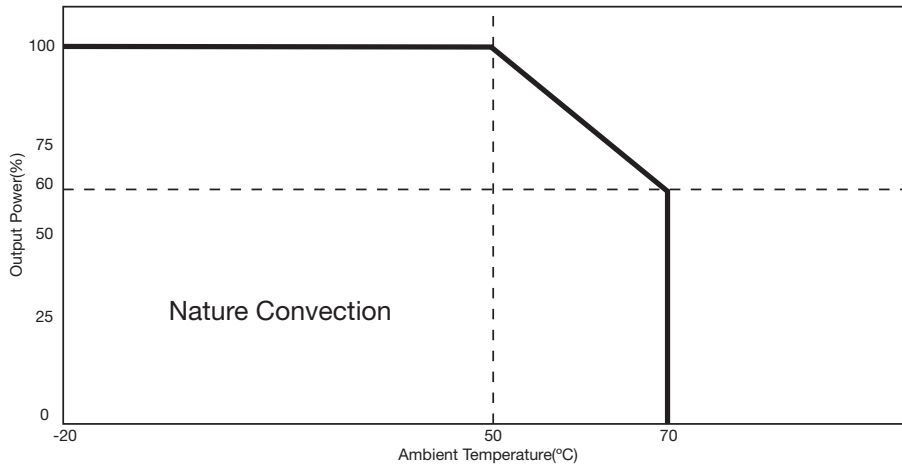


Circuit Schematic (Single)


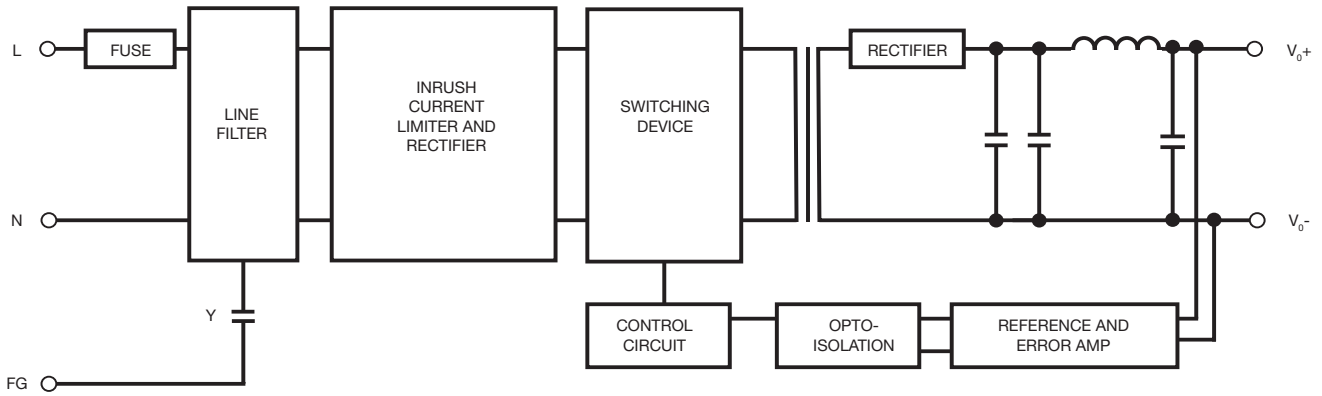


UIL10 SERIES

Circuit Schematic (Dual)

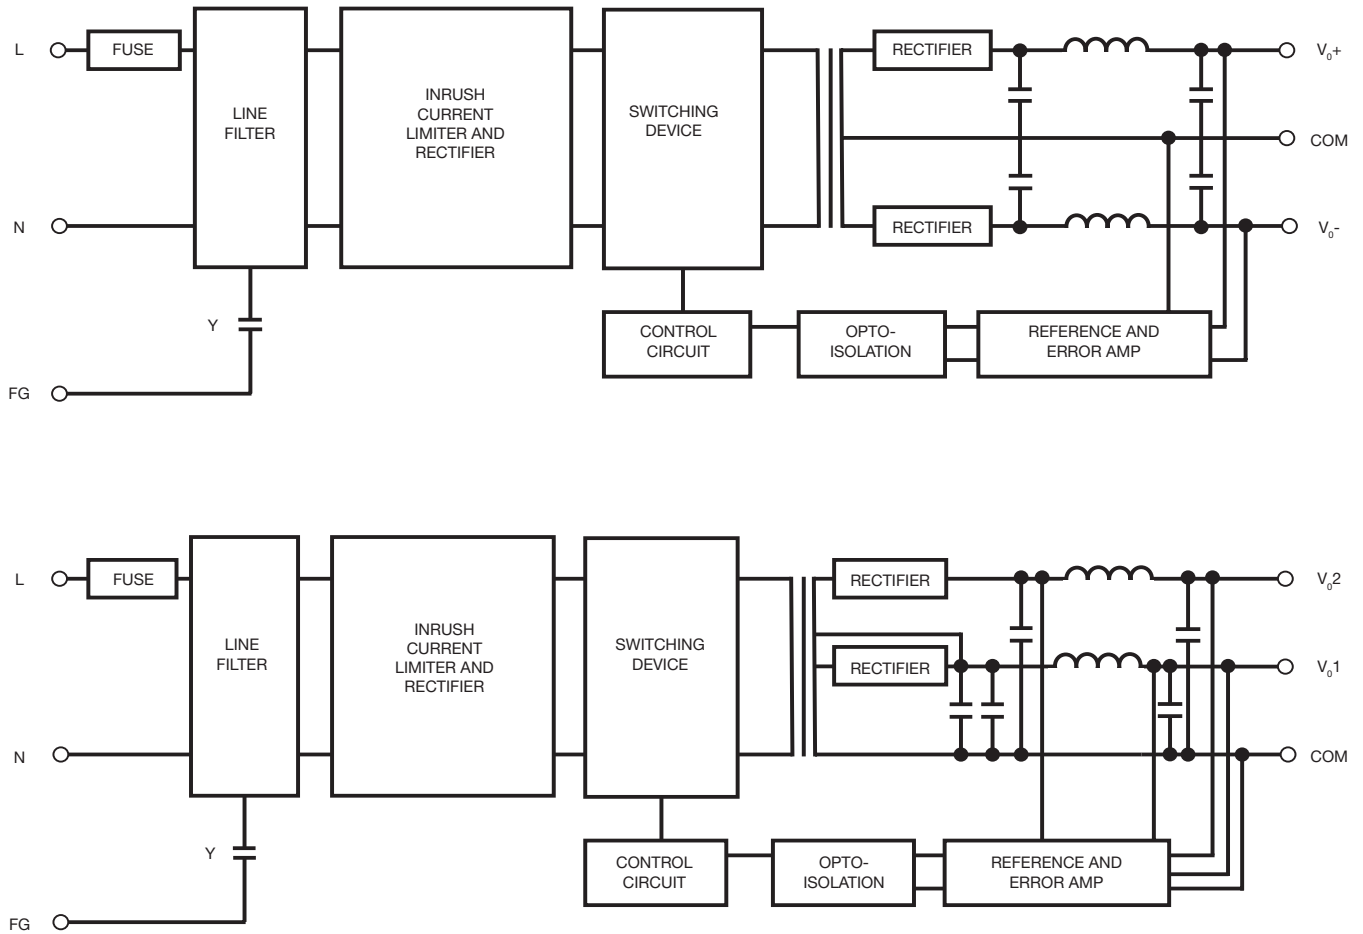

Mechanical Drawing

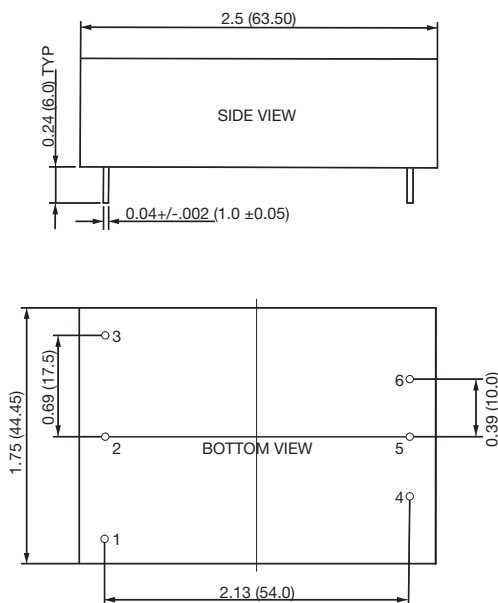


PIN CONNECTION

PIN	SINGLE	DUAL	DUAL
1	FG	FG	FG
2	ACN	ACN	ACN
3	ACL	ACL	ACL
4	-Vo	-Vo	+Vo2
5	NO PIN	COM	COM
6	+Vo	+Vo	+Vo1

1. All dimensions in inch (mm)

2. All Tolerance: ± 0.50

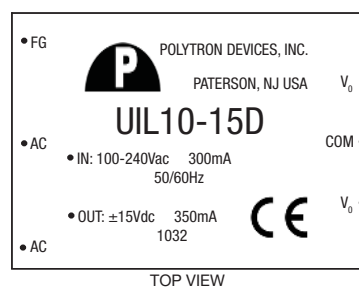

UIL10 SERIES

