



S3 SERIES MINIATURE HIGH VOLTAGE DC/DC CONVERTERS

FEATURES



* Customer Selects Output Voltages

- * Voltages up to 500Vdc
- * Wide Input Range (9-36 Vdc)
- * Efficiency 70% (typ.)
- * 500 Vdc Isolation
- * 24 PIN DIP Package
- * 52 kHz Switching Frequency
- * Single or Dual Outputs

The S3 Series of DC/DC converters accepts an ultra wide input range of 9-36 Vdc, delivering a 500 Vdc isolated high voltage output. All models feature a 24-pin dip compatible configuration, continuous short circuit protection, and a low ESR input capacitor.

ELECTRICAL SPECIFICATIONS

Voltage Accuracy	+/- 5%	Short Circuit Protection	Input Current Foldback
Input Regulation	+/- 1% / 20% of Vin	Input Filter	Low ESR Capacitor
Load Regulation	(20% to full load) +/-4%	Efficiency	65% (typ.)
Output Ripple	< 0.3%	Switching Frequency	52 kHz
Peak Start-up Current	2A	Isolation	500Vdc

GENERAL SPECIFICATIONS

Temp. Stability.....	+/- 0.02%/°C	Temp. Derating	None
Temp. (Operating,Case)	-25 to +70°C	Cooling	Free-Air Convection
Temp. (Storage)	-40 to +100°C		

** All models designed to meet UL 60950*

** For RoHS Compliant part, add suffix /Y*

PHYSICAL SPECIFICATIONS


Dimensions	0.8 x 1.25 x 0.52 inches	Case Material	Black Plastic
Weight	0.7 Oz		



S3 SERIES MINIATURE HIGH VOLTAGE DC/DC CONVERTERS


REPRESENTATIVE MODEL LISTING						
MODEL NUMBER	INPUT SPECIFICATIONS		OUTPUT SPECIFICATIONS			
	VOLTAGE	CURRENT	+ OUTPUT		- OUTPUT	
			VOLTAGE	CURRENT	VOLTAGE	CURRENT
S3-S50	9V - 36V	0.47A - 0.12A	50V	60ma	N/A	N/A
S3-D50	9V - 36V	0.47A - 0.12A	50V	30ma	50v	30ma
S3-S75	9V - 36V	0.47A - 0.12A	75V	40ma	N/A	N/A
S3-D75	9V - 36V	0.47A - 0.12A	75V	20ma	75v	20ma
S3-S100	9V - 36V	0.47A - 0.12A	100V	30ma	N/A	N/A
S3-D100	9V - 36V	0.47A - 0.12A	100V	15ma	100v	15ma
S3-S150	9V - 36V	0.47A - 0.12A	150V	20ma	N/A	N/A
S3-D150	9V - 36V	0.47A - 0.12A	150V	10ma	150v	10ma
S3-S200	9V - 36V	0.48A - 0.13A	200V	15ma	N/A	N/A
S3-D200	9V - 36V	0.48A - 0.13A	200V	7.5ma	200v	7.5ma
S3-S250	9V - 36V	0.48A - 0.13A	250V	12ma	N/A	N/A
S3-D250	9V - 36V	0.48A - 0.13A	250V	6ma	250v	6ma
S3-S300	9V - 36V	0.48A - 0.13A	300V	10ma	N/A	N/A
S3-S350	9V - 36V	0.48A - 0.13A	350V	8ma	N/A	N/A
S3-S400	9V - 36V	0.48A - 0.13A	400V	7.5ma	N/A	N/A
S3-S500	9V - 36V	0.48A - 0.13A	500V	6ma	N/A	N/A

* RoHS Compliant add suffix /Y

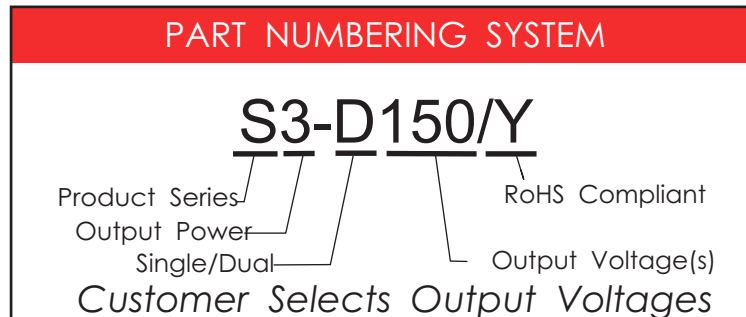



S3 SERIES MINIATURE HIGH VOLTAGE DC/DC CONVERTERS

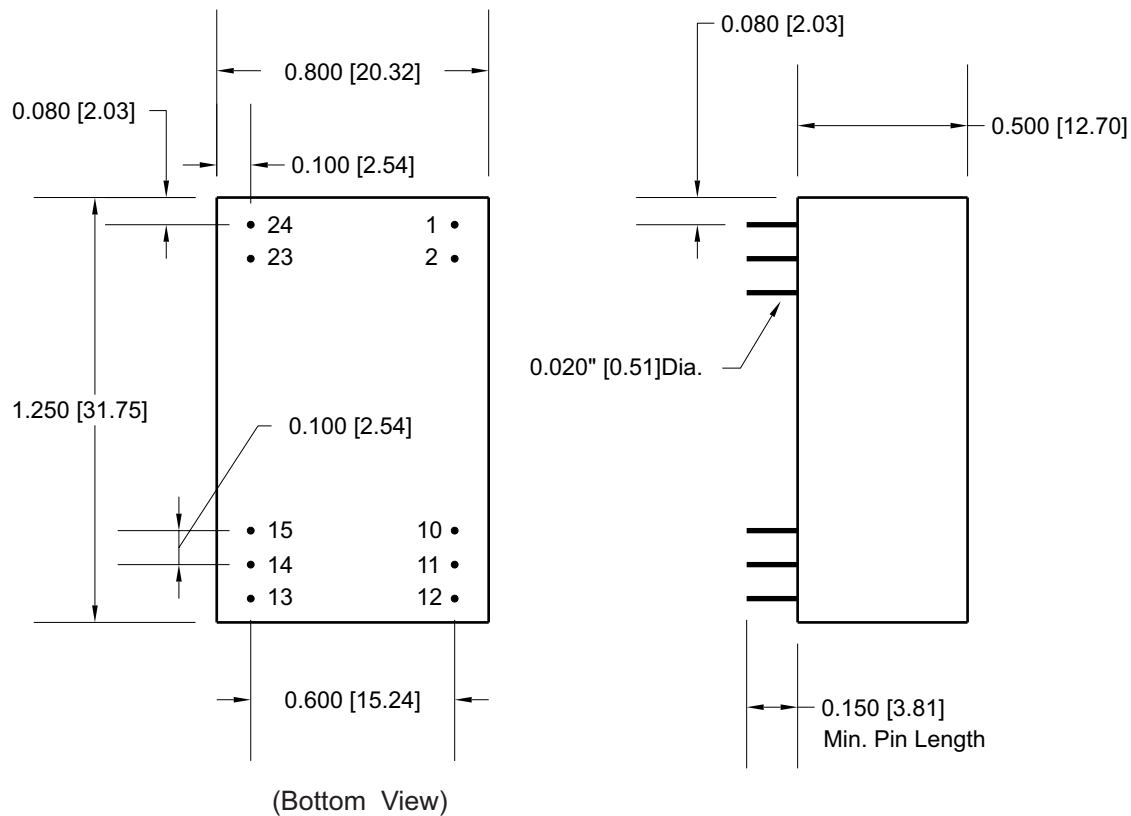

Pin #	Single	Dual
1 & 24	+ INPUT	+ INPUT
2 & 23	- INPUT	- INPUT
10 & 15	+ OUTPUT	+ OUTPUT
11 & 14	N/C	COM
12 & 13	- OUTPUT	- OUTPUT

*Dimensions are in Inches
[Metric equivalents in brackets]*